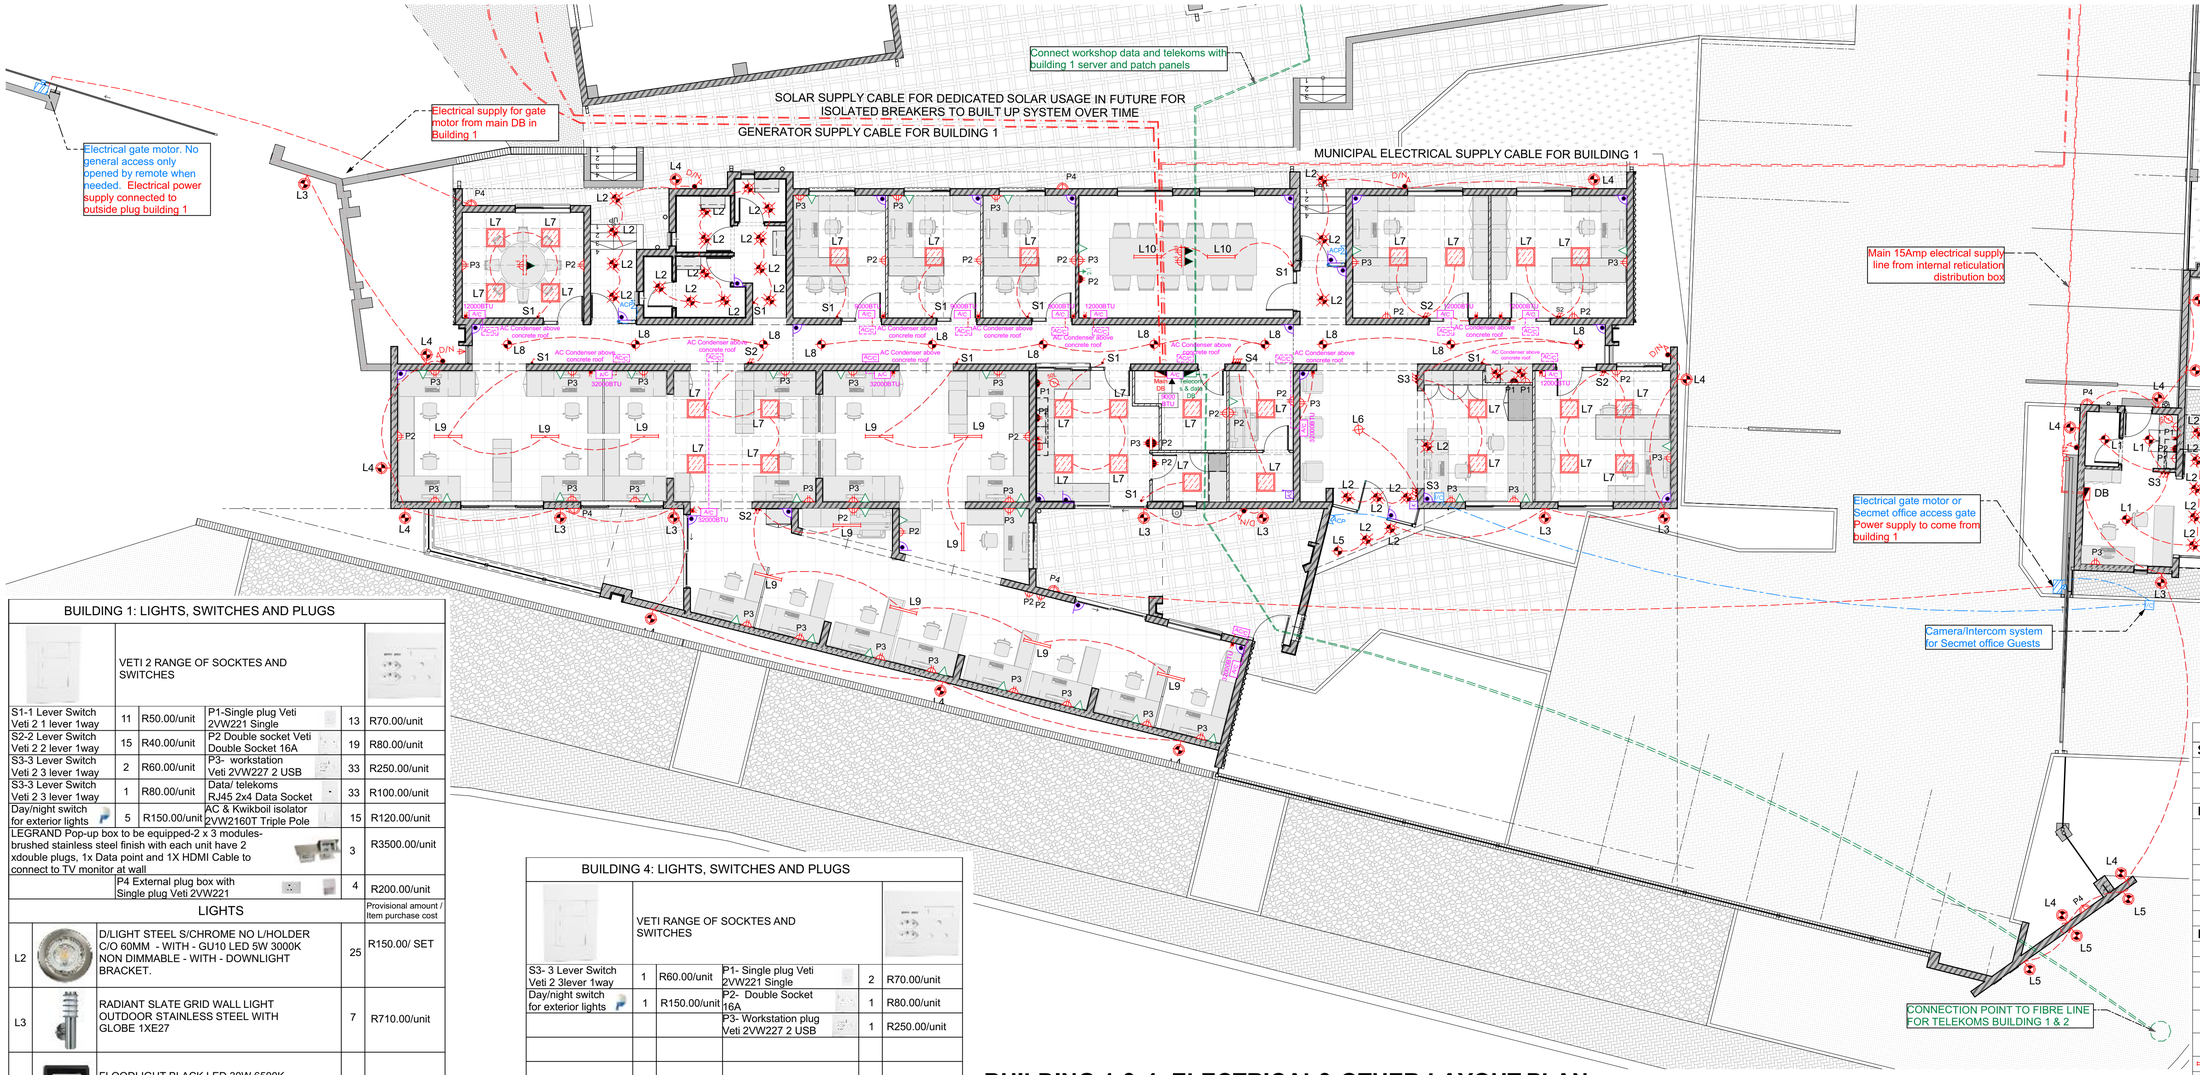

BUILDING 1 & 4: ELECTRICAL& OTHER LAYOUT PLAN

SCALE: 1:100

BUILDING 1: LIGHTS, SWITCHES AND PLUGS

	VETI 2 RANGE OF SOCKTES AND SWITCHES				
S1-1 Lever Switch Veti 2 1 lever 1way	11	R50.00/unit	P1-Single plug Veti 2VW221 Single	13	R70.00/unit
S2-2 Lever Switch Veti 2 2 lever 1way	15	R40.00/unit	P2 Double socket Veti Double Socket 16A	19	R80.00/unit
S3-3 Lever Switch Veti 2 3 lever 1way	2	R60.00/unit	P3- workstation Veti 2VW227 2 USB	33	R250.00/unit
S3-3 Lever Switch Veti 2 3 lever 1way	1	R80.00/unit	Data/ telekoms RJ45 2x4 Data Socket	33	R100.00/unit
Day/night switch for exterior lights	5	R150.00/unit	AC & Kwikboil isolator 2VW2160T Triple Pole	15	R120.00/unit
LEGRAND Pop-up box to be equipped-2 x 3 modules-brushed stainless steel finish with each unit have 2 xdouble plugs, 1x Data point and 1X HDMI Cable to connect to TV monitor at wall				3	R3500.00/unit
	P4 External plug box with Single plug Veti 2VW221			4	R200.00/unit

			Provisional amount / Item purchase cost
	LIGHTS		
L2	D/LIGHT STEEL S/CHROME NO L/HOLDER C/O 60MM - WITH - GU10 LED 5W 3000K NON DIMMABLE - WITH - DOWNLIGHT BRACKET.	25	R150.00/ SET
L3	RADIANT SLATE GRID WALL LIGHT OUTDOOR STAINLESS STEEL WITH GLOBE 1XE27	7	R710.00/unit
L4	FLOODLIGHT BLACK LED 30W 6500K	9	R200.00/unit
L5	RADIANT SPOTLIGHT OUTDOOR DIE CAST BLACK 1XMR16- FITTED ON STEEL 1000MM 30x30 rectangular steel pole fixed to top of wall to shine on signage on wall	1	R340.00/unit
L6	RADIANT 3 RINGS PENDANT CHROME LED 60W LPN0007CH--RP204	1	R3100.00/unit
L7	RADIANT PANEL LED 25W 5000K BACKLIT 600X600MM LPL001A--25w RPR299	29	R800.00/unit
L8	RADIANT MONTE CEILING LIGHT WHITE E27 2X15W JM61-AL/W RC160	11	R680.00/unit
L9	RADIANT 5FT DOUBLE OPEN T8 FLUORESCENT 1530MM 2X58W ELECTRONIC KA25E-W RPR221	11	R850.00/unit
L10	RADIANT DECO CEILING LIGHT 1400MM S/CHROME T8 FLUORESCENT 2X36W KE01ESC-RC193SC	2	R1350.00/unit
	WATER HEATING		Provisional amount / Item purchase cost
H1	Kwikot Kwikboil 10 Litre Water Heater (White)	1	R10500.00/unit
H2	Kwikot DSG-100-5 400KPA Superline Dual Geyser	1	R4200.00/unit

BUILDING 4: LIGHTS, SWITCHES AND PLUGS

	VETI RANGE OF SOCKTES AND SWITCHES				
S3- 3 Lever Switch Veti 2 3lever 1way	1	R60.00/unit	P1- Single plug Veti 2VW221 Single	2	R70.00/unit
Day/night switch for exterior lights	1	R150.00/unit	P2- Double Socket 16A	1	R80.00/unit
			P3- Workstation plug Veti 2VW227 2 USB	1	R250.00/unit
			Under counter Geyser 2VW2160T Triple Pole	1	R120.00/unit
	P4 External plug box with Single plug Veti 2VW221			2	R110.00/unit

			Provisional amount / Item purchase cost
	LIGHTS		
L1	RADIANT MONTE CEILING LIGHT WHITE WITH E27 1X15W	3	R610.00/unit
L2	D/LIGHT STEEL S/CHROME NO L/HOLDER C/O 60MM - WITH - GU10 LED 5W 3000K NON DIMMABLE - WITH - DOWNLIGHT BRACKET.	5	R150.00/ SET
L3	RADIANT SLATE GRID WALL LIGHT OUTDOOR STAINLESS STEEL WITH GLOBE 1XE27	3	R710.00/unit
L4	FLOODLIGHT BLACK LED 30W 6500K	4	R200.00/unit
L5	RADIANT SPOTLIGHT OUTDOOR DIE CAST BLACK 1XMR16- FITTED ON STEEL 1000MM 30x30 rectangular steel pole fixed to top of wall to shine on signage on wall	3	R340.00/unit
	WATER HEATING		Provisional amount / Item purchase cost
H3	Prisma Classique 10lt – Under Basin FPRX-10-UB Must include presure release mixer	1	R3500.00/unit

SECURITY	Quantity: 1	Client to install own ALARM, ACCESS CONTROL Systems. The appointed main contractors shall conduits withdraw wires to points as indicated on plans.
GATE MOTORS	MO2 SLIDING GATE MOTOR Quantity: 3	CENTURION -D5 SMART -GATE MOTOR installed with sliding gate as per door schedule with anti-theft security bar and to be connected to alarm systeM COMPLETE KIT Provisional amount R8,000.00/unit

LEGEND

SWITCHES	
	1 Way Switch @ 1200mm above FFL.
D/N	Day/night switch located 2000mm Abone FFL.
	30 Amp Isolator Switch@ 2000mm above FFL.
POWER SOCKETS	
	Single Switched Socket - Weatherproof @ 300mm above FFL.
	Single Switched Socket @ 1100mm above FFL.
	Single Switched Socket @ 300mm above FFL.
	Double Switched Socket @ 300mm above FFL.
	Double Switched Socket @ 1100mm above FFL.
	Double Switched Floor Socket.
LIGHTS	
	Ceiling Light.
	Recessed Downlighter.
	Pendant Light.
	Chandelier Light.
	Wall Mounted exterior Weatherproof Light. @ 2200mm above FFL.
	600x600 LED Diffused light in suspended ceiling
	LED Tube light surface mounted
MISCELLANEOUS ELECTRICAL	
	Television Socket @ 2100mm above FFL.
	Hydroboil
	50l Geyser.
	Distribution Board.
	Projector connected to power supply & connected to HDMI socket connection point
TELEKOMS AND DATA	
	Telephone/DATA Socket @ 300mm above FFL.
	Telephone/data Socket in floor box
	TELEKOMS & DATA & ROUTER Distribution Board.
	Ceiling mounter WiFi router connected to main router for cableless connectivity
AIR CONDITIONING	
AC	Air Conditioning Unit.
ACD	Air Conditioning - Condensing Unit.
ACCESS CONTROL	
IC	Intercom @ 1200mm above FFL.
	Electric gate motor with remote or tag opening system
ACP	Access control point connected to door magnetic strike lock
ALARM SYSTEM	
	Alarm Keypad @ 1200mm above FFL.
	Alarm System/Transmitter.
	Alarm PIR Sensor movement sensor
	Alarm door closure sensor

Copyright held by 3-Cubes Architects

Notes:

1. All work to be carried out strictly in accordance with municipal regulations and National Building Regulations SANS 10400.
2. Figured Dimensions to be taken in preference to scaling drawings and Dimensions in mm unless otherwise stated.
3. All relevant details, level, dimentions to be checked on site before commencement of work.
4. All drawings are to be checked by the main contractor and any discrepancies in the drawings are to be checked by the main contractor and any discrepencies in the drawings or between the drawings are to be referred to the architects.

REVISIONS

No	DATE	DESCRIPTION
A	2022-11-25	ISSUED FOR FINAL APPROVAL

Relationship between Author & Practice SACAP Registered Principal: SAME X EMPLOYEE / IN ASSOCIATION WITH

BY ORDER OF - NAME OF AUTHOR OF PLANS: Charl-Bradford Stringer

IF IN ASSOCIATION WITH WAS CHOSEN SUPPLY SACAP-ECSA-SACLAP REGISTRATION NUMBER & CATEGORY OF REGISTRATION & ID Nr.

COUNCIL: SACAP Reg No. PrArch 24749230 ID NR: 7611185051080

3 CUBES ARCHITECTS

3 Cubes Architects (Pty) Ltd
2020/014573/07
1 Wright Street, Secunda
Director:
CHARL-B STRINGER,
PrArch 24749230

www.3-cubesarchitects.co.za - info@3-cubesarchitects.co.za - 0845539397

PROJECT DESCRIPTION: MEGCHEM - TRAINING CENTER, SECMET OFFICES & WORKSHOP

ERF NUMBER	8965
TOWN LOCATED	SECUNDA
STREET ADDRESS	KINGFISHER ROAD
REGISTERED OWNERS NAME	MTP PROPERTIES
SIGNED SACAP REG. PROF	
SIGNED OWNER	

DRAWING DESCRIPTION: BUILDING 1: ELECTRICAL PLAN-GROUND FLOOR

PAGE SIZE	REV. NO	DRAWING PAGE NUMBER
A1	A	3CA-22002-SH007.1

C:\2. 3 CUBES ARCHITECTS PROJECT FILES\2022-Projects\3CA-22002-MEGCHEM- ERF8965-TRAINING\2. ARCHICAD\3CA-22002-Mechem-OVERALL SITE DESIGN-4.pln | 2022/11/27