LEGEND

SWITCHES
- 1 Way Switch @ 1200mm above FFL.
- Day/night switch located 2000mm Abone FFL.
- 30 Amp Isolator Switch@ 2000mm above FFL.

POWER SOCKETS
- Single Switched Socket - Weatherproof @ 300mm above FFL.
- Single Switched Socket @ 1100mm above FFL.
- Single Switched Socket @ 300mm above FFL.
- Double Switched Socket @ 300mm above FFL.
- Double Switched Socket @ 1100mm above FFL.
- Double Switched Floor Socket.

LIGHTS
- Ceiling Light.
- Recessed Downlighter.
- Pendant Light.
- Chandelier Light.
- Wall Mounted exterior Weatherproof Light. @ 2200mm above FFL.
- 600x600 LED Diffused light in suspended ceiling
- LED Tube light surface mounted

MISCELLANEOUS ELECTRICAL
- Television Socket @ 2100mm above FFL.
- Hydroboil
- 50l Geyser.
- Distribution Board.
- Projector connected to power supply & connected to HDMI socket connection point

TELEKOMS AND DATA
- Telephone/DATA Socket @ 300mm above FFL.
- Telephone/data Socket in floor box
- TELEKOMS & DATA & ROUTER Distribution Board.
- Ceiling mounter WiFi router connected to main router for cableless connectivity

AIR CONDITIONING
- Air Conditioning Unit.
- Air Conditioning - Condensing Unit.

ACCESS CONTROL
- Intercom @ 1200mm above FFL.
- Electric gate motor with remote or tag opening system
- Access control point connected to door magnetic strike lock

ALARM SYSTEM
- Alarm Keypad @ 1200mm above FFL.
- Alarm System/Transmitter.
- Alarm PIR Sensor movement sensor
- Alarm door closure sensor

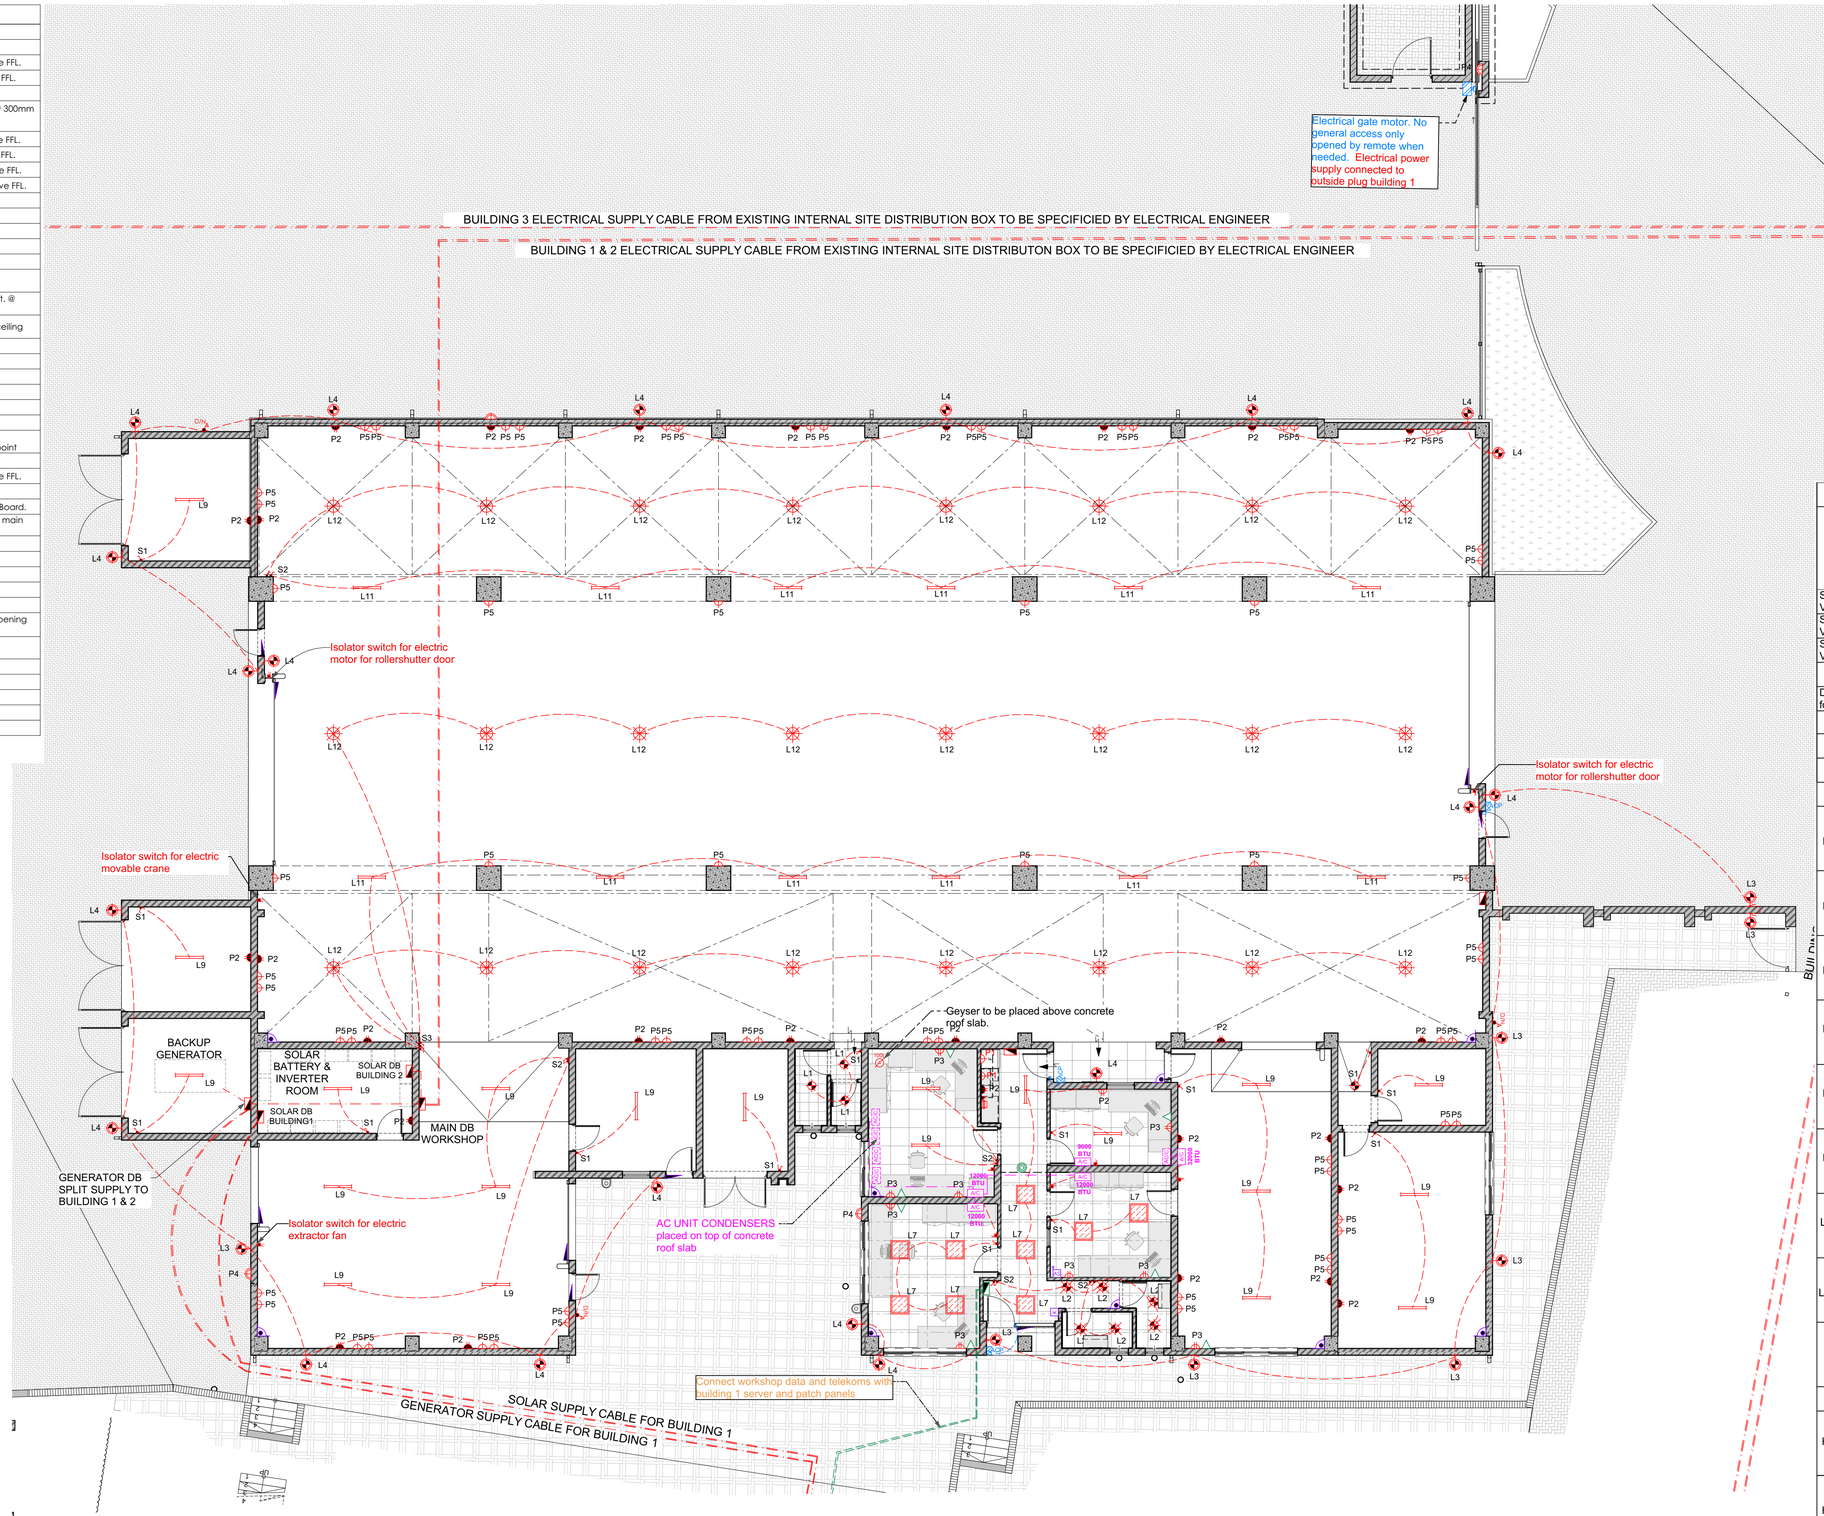

BUILDING 2: ELECTRICAL AND OTHER LAYOUT PLAN

SCALE: 1:100

BUILDING 2: LIGHTS, SWITCHES AND PLUGS

			VETI 2 RANGE OF SOCKTES AND SWITCHES		
S1-1 Lever Switch Veti 2 1 lever 1way	14	R50.00/unit			
S2-2 Lever Switch Veti 2 2 lever 1way	5	R40.00/unit	P2 Double socket Veti Double Socket 16A	30	R80.00/unit
S3-3 Lever Switch Veti 2 3 lever 1way	1	R60.00/unit	P3- workstation Veti 2VW227 2 USB	9	R250.00/unit
			Data/ telekoms RJ45 2x4 Data Socket	9	R100.00/unit
Day/night switch for exterior lights	3	R150.00/unit	P5-CEE 63A 5 Pin Industrial Socket	63	R2600.00/unit
			AC & Kwikboil isolator 2VW2160T Triple Pole	5	R120.00/unit
			P4 External plug box with Single plug Veti 2VW221	3	R200.00/unit

	LIGHTS		Provisional amount / Item purchase cost
L1	RADIANT MONTE CEILING LIGHT WHITE WITH E27 1X15W	3	R610.00/unit
L2	D/LIGHT STEEL S/CHROME NO L/HOLDER C/O 60MM - WITH - GU10 LED 5W 3000K NON DIMMABLE - WITH - DOWNLIGHT BRACKET.	6	R150.00/ SET
L3	RADIANT SLATE GRID WALL LIGHT OUTDOOR STAINLESS STEEL WITH GLOBE 1XE27	7	R710.00/unit
L4	FLOODLIGHT BLACK LED 30W 6500K	21	R200.00/unit
L7	RADIANT PANEL LED 25W 5000K BACKLIT 600X600MM LPL001A--25w RPR299	9	R800.00/unit
L9	RADIANT 5FT DOUBLE OPEN T8 FLUORESCENT 1530MM 2X58W ELECTRONIC KA25E-W RPR221	20	R850.00/unit
L11	RADIANT 5FT DOUBLE VAPOUR PROOF WIRED FOR LED T8 2X24W 1585MM KKB65EC-RPR263	13	R600.00unit
L12	EXTREME LIGHTS 100W UFO LED High Bay Flood Light 6500K Black. Hanging from chain suspended from roof purlin	24	R1900.00unit
	WATER HEATING		Provisional amount / Item purchase cost
H1	Kwikot Kwikboil 10 Litre Water Heater (White)	1	R10500.00/unit
H2	Kwikot DSG-100-5 400KPA Superline Dual Geyser	1	R4200.00/unit

Copyright held by 3-Cubes Architects

Notes:

1. All work to be carried out strictly in accordance with municipal regulations and National Building Regulations SANS 10400.
2. Figured Dimensions to be taken in preference to scaling drawings and Dimensions in mm unless otherwise stated.
3. All relevant details, level, dimentions to be checked on site before commencement of work.
4. All drawings are to be checked by the main contractor and any discrepancies in the drawings are to be checked by the main contractor and any discrepencies in the drawings or between the drawings are to be referred to the architects.

REVISIONS

No	DATE	DESCRIPTION
A	2022-11-25	ISSUED FOR FINAL APPROVAL

Relationship between Author & Practice SACAP Registered Principal: SAME X EMPLOYEE; IN ASSOCIATION WITH

BY ORDER OF - NAME OF AUTHOR OF PLANS: Charl-Bradford Stringer

IF IN ASSOCIATION WITH WAS CHOSEN SUPPLY SACAP-ECSA-SACLAP REGISTRATION NUMBER & CATEGORY OF REGISTRATION & ID Nr.

COUNCIL: SACAP Reg No. PrArch 24749230 ID NR: 7611185051080

3 CUBES ARCHITECTS
www.3-cubesarchitects.co.za - info@3-cubesarchitects.co.za - 0845539397

3 Cubes Architects (Pty) Ltd
2020/014573/07
1 Wright Street, Secunda
Director:
CHARL-B STRINGER,
PrArch 24749230

PROJECT DESCRIPTION: MEGCHEM - TRAINING CENTER, SECMET OFFICES & WORKSHOP

ERF NUMBER	8965
TOWN LOCATED	SECUNDA
STREET ADDRESS	KINGFISHER ROAD
REGISTERED OWNERS NAME	MTP PROPERTIES
SIGNED SACAP REG. PROF	
SIGNED OWNER	

DRAWING DESCRIPTION: BUILDING 2: ELECTRICAL LAYOUT PLAN GROUND FLOOR

PAGE SIZE: A1 | REV. NO: A | DRAWING PAGE NUMBER: 3CA-22002-SH007.2

C:\2. 3 CUBES ARCHITECTS PROJECT FILES\2022-Projects\3CA-22002-MEGCHEM- ERF8965-TRAINING\2. ARCHICAD\3CA-22002-Mechem-OVERALL SITE DESIGN.4.pln | 2022/11/25